



# Tsunami QuickBridge 20

## Wireless Outdoor Bridge



### APPLICATIONS

- Enterprise LAN and PBX extension
- Redundant links between locations
- Voice and data backhaul from remote POPs
- Dedicated ISP connections for large subscribers
- Connectivity for long distances
- Affordable alternative to wired networks
- High-performance alternative to indoor 802.11b bridges

### Data Connectivity Made Simple

Proxim's Tsunami QuickBridge 20 is a complete, user-installable wireless point-to-point bridging solution designed for reliable building-to-building data connectivity. With 18 Mbps aggregate throughput, this hop-in-a-box is a high-performance, cost-effective alternative to leased lines and indoor Wi-Fi bridges. Eliminating the deployment challenges and recurring fees associated with standard T1 and E1 installations, the Tsunami QuickBridge 20 pays for itself in less than one year.

- Nearly three times the throughput of 802.11b bridges and more than seven times the speed of a T1/E1 leased line
- Voice over IP support enables low-cost voice transmission
- Web-based QuickBridge Manager allows flexible management of local and remote radios

### Designed for Complete Ease of Use

Tsunami QuickBridge is the easiest-to-install family of broadband wireless bridges on the market. Requiring no training or wireless experience, they can be set up and installed within hours. Each solution includes everything you need to set up a link right out of the box.

- Hop-in-a-box solution includes two radios with integrated antennas, cables, mounting hardware, power supply and documentation
- Easy to use software enables fast configuration
- Audible tones ensure antennas are properly aligned

### Cost-effective Connectivity

The Tsunami QuickBridge family offers the best price-performance for campus networking and backhaul

applications. Supporting voice and data transmission, they can easily replace T1/E1 or DS-3 connections with a payback of less than one year.

- Capacity from 6 to 54 Mbps supports enterprise and service provider bandwidth-intensive applications
- Connectivity for buildings located up to 6 miles away
- Synchronous voice channels available for low cost PBX extensions

### Flexibly Manage Your Entire QuickBridge Network

Designed for outdoor networks, Tsunami QuickBridge management tools enable network managers to view and proactively maintain all radios located throughout multiple facilities. In contrast to leasing lines, network ownership gives managers complete visibility into local and remote bridges.

- Built-in SNMP support and web-based QuickBridge Manager simplify remote management and integrate easily into existing network policies
- Proactive alarm notifications enable network managers to maximize network performance

### Secure & Reliable


A wireless alternative to a wired network provides greater control over network quality. Backed by more than 20 years of wireless design innovation, Proxim's Tsunami QuickBridge solutions offer the highest security and reliability available in networking today.

- Up to 99.995% RF link availability
- Meets or exceeds wired network security
- Proprietary encryption methods ensure secure data transmission


## Installation As Easy As 1-2-3



- 1** Mount Quickbridge onto outside of each building

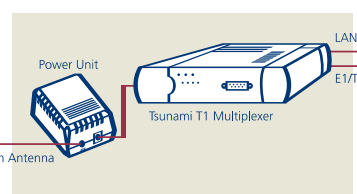

- 2** Using supplied CAT-5 cable, connect Quickbridge unit to indoor power unit, then to Tsunami T1 Multiplexer and power up units

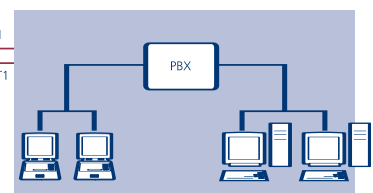

- 3** Connect directly to existing LAN and PBX

## About Proxim

Proxim Corporation is a global leader in wireless networking equipment for Wi-Fi and broadband wireless networks. The company provides its enterprise and service provider customers with wireless solutions for the mobile enterprise, public hot spots, security and surveillance, last mile access, metropolitan area networks and voice and data backhaul.

# Tsunami QuickBridge 20 Specifications

	FREQUENCY BAND	AGGREGATE THROUGHPUT	CHANNEL PLANS	THRESHOLD (BER=1X10 <sup>-6</sup> )	EIRP OUTPUT POWER	SYSTEM GAIN (INCLUDING ANTENNA)	DISTANCE (MILES/KM)
QuickBridge 20	5.725–5.825 GHz	18 Mbps	7	-89dBm	+36 dBm	145 dB	Up to 6 miles/10 Km
RADIO CHARACTERISTICS		CHANNEL PLAN	FREQUENCY	CHANNEL PLAN	FREQUENCY		
Frequency		3A	5740.401 MHz	4A	5743.85 MHz		
		3B	5774.984 MHz	4B	5764.60 MHz		
		3C	5809.568 MHz	4C	5785.35 MHz		
				4D	5806.10 MHz		
Transmit Output Power	+16 dBm max; +15 dBm typical						
Antenna	Integrated LHCP; 20dBi, 10° azimuth by 10° elevation						
Maximum Receive Level	-20 dBm error free						
Latency	2.5 msec typical, 5 msec maximum						
Access Method	Time Division Duplex						
Modulation Technique	QPSK with equalization and FEC						
Security Key	16 Character Security ID (Alphanumeric); authentication and PN transmission; scrambling						
Compliance	US: FCC Part 15.247 ISM; Canada: IC RSS 210; Model 40100-25						
DATA INTERFACE							
Ethernet Interface	10/100BaseT via AC power adapter						
Connector	RJ-45 female modular plug w/ weather-protected shell						
Cable Type	CAT5						
Compliance	IEEE 802.3						
MANAGEMENT							
Local, Remote Access	QuickBridge Manager (Java-based GUI) for discovery, status, and configuration						
Software Upgradeable	Over-the-air reprogramming						
Security	2-level password access on Manager						
ELECTRICAL SPECIFICATIONS		QUICKBRIDGE					
AC Power	Adapter included, 110 VAC or 220 VAC, 450mA; Output: 28V DC, 0.6 A						
DC Power (to unit)	+18 – +28 VDC						
Power Connector	Power over Ethernet CAT5 cable RJ-45						
ENVIRONMENTAL SPECIFICATIONS		QUICKBRIDGE					
Operational Temperature	-25°–55° C						
Storage Temperature	-55°–85° C						
Humidity	5–100% condensing						
Altitude	Up to 10,000 ft						
Wind Loading	115 mph						
PHYSICAL SPECIFICATIONS		QUICKBRIDGE					
Dimensions	10.5 x 10.5 x 7 in; 26.5 x 2 6.5 x 1 4.4 cm						
Weight	10 lbs/4.5 kg						
Mounting (Installation)	Pole Mount 1.5–2.75 in/3.08–6.98 cm O.D. (hardware included for 1.75 in/4.4 cm O.D.)						
PACKAGE CONTENTS							
2 QuickBridge Radio Units, 2 sets mounting hardware, 2 power adapters, 2 sets 50 meter Cat5 cable, 2 sets user documentation & utilities on CD-Rom							
ORDERING INFORMATION							
301-48001-002		Tsunami QuickBridge 20 Kit – 110/220 VAC					

Proxim Corporation  
 935 Stewart Drive  
 Sunnyvale, California 94085  
 tel: 800.229.1630  
 tel: 408.731.2700  
 fax: 408.731.3675  
 www.proxim.com

